


Barrier Free Architecturals 480 E Franklin Rd, #108, Meridian, ID 83646 1(877) 717-7027 or visit: www.barrierfree.org EMAIL: info@barrierfree.org


Specifications

ACXSYM1001

Shower Package, Symmons Valve

Valve and hand held shower assembly including Symmoms Pressure Balanced Mixing Valve with adjustable stop screw to limit handle turn #15-1-X-FG, Standard 28" Glide Bar, Standard 2-mode EcoFriendly Hand Held Shower, Supply Elbow, Vacuum Breaker and Flex Hose.

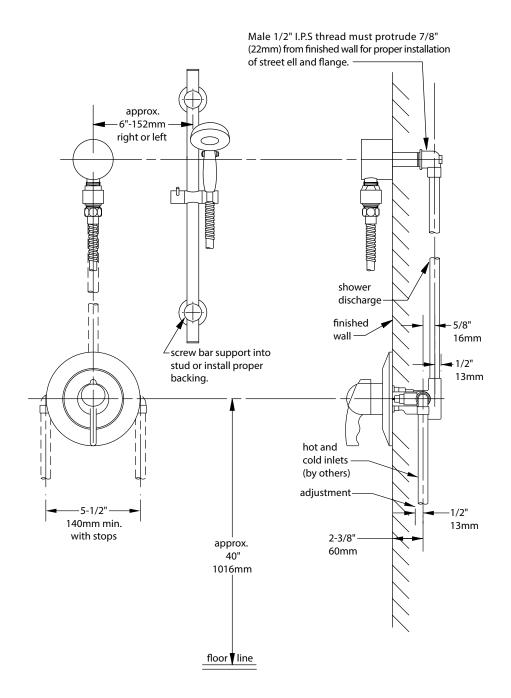

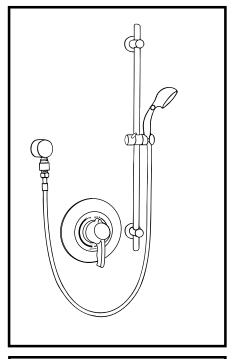

SYMMONS PRODUCTS MEET
ANSI A112.18.1M, EPA '92
AND ALL KNOWN FLOW RATE
REQUIREMENTS.
Showerheads and Hand Showers
2.0 GPM (9.5 L/min)



This drawing to be used for rough-in installation only. All floor to center dimensions optional. Concealed piping and fittings not furnished by manufac-

turer. Dimensions are for ADA compliance (American with Disabilities Act). Consult ADAAG or your state regulations for proper product choice and mounting locations. For complete installation, adjustment and service information, see installation instructions.

Rev 06/10 ACXSYM1001 Page 1 of 1