

MODEL: LDS7347A75T*




PERSPECTIVE VIEW - N.T.S. MODEL SHOWN HERE AS:

LEFT AND RIGHT REVEAL RIGHT SEAT RIGHT PLUMBING



TOP VIEW - SCALE $\frac{3}{8}$ " = 1'-0"



Features:

- -ADA compliant roll-in shower
- -Available in various threshold heights
- -Extra deep for easy straight on wheelchair approach
- -Molded, one piece gelcoat/fiberglass shower module

SEE **OVER**

- -"Diamond Tile" wall finish, white (standard)
- -Integral full wood backing for strength and unlimited accessory placement
- -"Reveal 90" front flange design allows for clear floor space and transfer
- -On all threshold heights 1-1/2" or taller,
- no mud set is required
- -On all threshold heights 1-1/4" or shorter, no mud set is required, but an epoxy adhesive kit is supplied

*OTHER THRESHOLD HEIGHTS **AVAILABLE UPON REQUEST**

	UNII	THRESHOLD
	HEIGHT	HEIGHT
MODEL#	Y	Z*
LDS7347A75T	78-3/4"	3/4" MIN.
LDS7347A2T	80"	2" MAX.

* - SEE BACK FOR DETAIL SECTIONS

PRODUCT SPECIFICATIONS:

-One piece shower module shall be constructed of gelcoat/fiberglass with full integral plywood backing -Rough-In: Stud opening +1/4" -0" Nominal Dimensions.

C.S.I. FORMAT SPECIFICATION TEXT AVAILABLE

PRODUCT INFORMATION:

-Accessories: Factory installed, unless prone to damage during installation/shipping. Polished chrome/satin stainless standard, others available.

- -Colors: White as standard, others to match any major fixture manufacturer, also available with sprayable solid surface in many colors
- -Custom curb heights, other than shown, are available (between min. and max.)

ACCESSORIES:

INSTALLED AT FACTORY:

-Grab bar

-Seat, folding

-Mixing valve, pressure balanced, lever handle, preplumbed tree to supply elbow

- -Vacuum breaker
- -Soap dish

INSTALLED BY OTHERS:

- -Curtain and rod
- -T-Shaped Rubber WaterStopper Kit
- -Semi-permanent Threshold Adaptor
- -Caulkless drain

CODES:

Designed and manufactured in compliance with the following standards and codes:

-A.N.S.I. Z124.2 Standards for Plastic Showers

-I.P.C. International Plumbing Code

-A.D.A. Accessibility Guildelines for Buildings and Facilities

-A.N.S.I. A117.1 Accessible and Usable Buildings and Facilities

-U.P.C. Uniform Plumbing Code


NOTICE OF LIMITATION:

- -Recess as needed to meet code
- -Adhere to floor as required
- -Reveal not recommended on common wall




We reserve the right to make revisions without notice in the design of fixtures or in packaging unless this right has specifically been waived at the time the order is accepted.



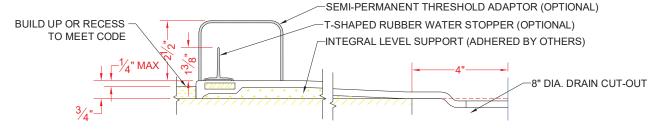


SECTION A-A - SCALE: 3" = 1'-0"



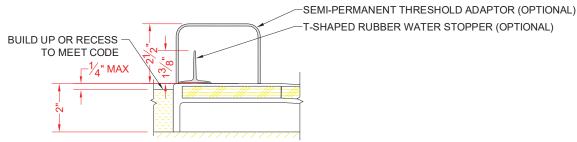


SECTION A-A - SCALE: 3" = 1'-0"


OTHER THRESHOLD HEIGHTS AVAILABLE UPON REQUEST



DETAIL B - SCALE: 3" = 1'-0"
WALL SECTION DETAIL



DETAIL C - SCALE: NTS TYPICAL FRAMING



DETAIL D - SCALE: 3" = 1'-0"
REVEAL DETAIL